


ASBESTOS FILLED CORRUGATED METAL GASKET

Asbestos filler covered with corrugated metal jacket. Better in resilience and sealability than a flat type, because its corrugated surface. Available in circular and slightly non-circular shape.

Application : Heat exchanger, Autoclave, Boiler, etc.
Service temperature : up to 530°C
Service pressure : up to 60 Kg/cm².
To seal : Steam, Water, Hot water, Hydrocarbon, Lubricants, Organic solvents, Cryogenic lines, etc.

Compliance with specification:
API 601 (Double Jacketed Corrugated)

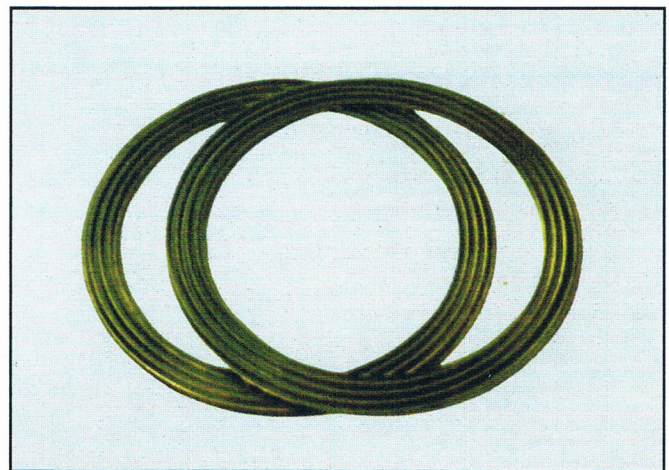

Dimensional data:

T (Gasket thickness) : 3.0 mm min.
W (Gasket width) : 15.0 mm min.
t (Corrugation height) : 1.0 ± 0.3mm
P (Corrugation pitch) : 6.0 mm

